



GLOBAL. MAGNETIC. FORCE.™

### Technical Data Sheet

### Neodymium Holding Magnet, Step Down


Utility-Grade assemblies for a wide variety of mass market applications. The BTN Series magnets use Neodymium Rare Earth magnets in a Zinc plated cup. BTN series magnets can be used with our available hooks.

#### Product Specifications

<b>Shape:</b>	<b>Assembly</b>
<b>Tolerance:</b>	<b>.005</b>
<b>Material:</b>	<b>NdFeB</b>
<b>Plating:</b>	<b>Zn</b>



Part No.	D	D	L	H	Tap Size (MG)	Holding Force (lbs)	Price
BTN32	1.26	.39	.61	.28	M5	78.7	\$10.83

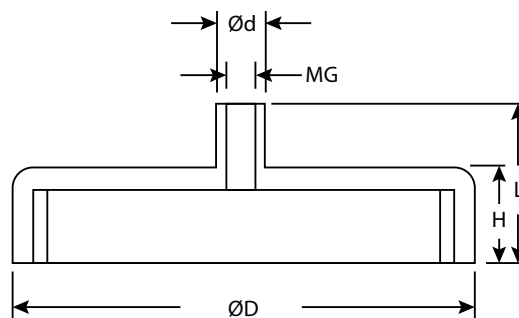

- All Measurements are in inches (unless otherwise noted)
- Direction of Magnetization (DOM) is through the thickness unless noted
- Unless otherwise specified, magnets will be furnished in magnetized condition
- Holding forces are approximate. These are average values obtained under laboratory conditions. Size, shape, and material of the test piece may affect actual pull forces

